
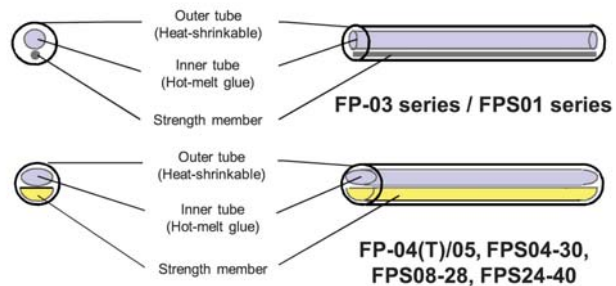


FIBRE PROTECTION SLEEVES

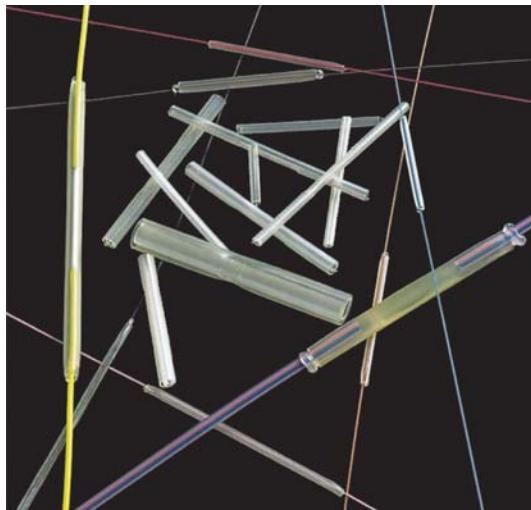

SPECIFICATIONS

Material	Outer tube	FP-03 series / FPS01series	Polyolefin based on Polyethylene
		FP-04(T) / FP-05	Ethylene-Vinyl Acetate
		FPS04-30 / FPS08-28 / FPS24-40	Polyolefin based on Polyethylene
	Inner tube		Ethylene-Vinyl Acetate
	Strength member	FP-03 series / FPS01 series	Stainless steel
		FP-04(T) / FP-05	Heat-resistant glass
		FPS04-30/FPS08-28/FPS24-40	Heat-resistant glass
Operation condition (after shrink)			-10 to 50 deg. C,O to 95% RH (Non dew)
Storage condition (before shrink)			-40 to 60 deg. C, Non dew

DIMENSIONS

APPLICABLE FIBRES

Model	Sleeve length	Strength member length	Diameter after shrink	Fibre count	Recommended cleave length	Coating diameter
FP-03	60mm	60mm	3.1mm	Single	16mm	0.25mm to 0.9mm
FP-03(L=40}	40mm	40mm	3.1mm	Single	10mm	0.25mm to 0.9mm
FP-04(T)	40mm	40mm	4.0mm	2 to 8	10mm	0.25mm (thickness)
FP-05	40mm	40mm	4.5mm x 4.0mm	2 to 12	10mm	0.25mm (thickness)
FPS04-30	30mm	30mm	2.4mm	2 to 4	10mm	0.25mm (thickness)
FPS08-28	28mm	28mm	3.3mm x 2.7mm	2 to 8	10mm	0.25mm (thickness)
FPS2440	40mm	40mm	8.0mm x 4.0mm	2 to 24	10mm	0.25mm (thickness)
FPS01-400-12	12mm	13mm	1.5mm	Single	4mm	up to 0.4mm
FPS01-400-15	15mm	16mm	1.5mm	Single	5mm	up to 0.4mm
FPS01-400-20	20mm	21mm	1.5mm	Single	8mm	up to 0.4mm
FPS01-400-25	25mm	26mm	1.5mm	Single	10mm	up to 0.4mm
FPS01-40Q-34	34mm	35mm	1.5mm	Single	15mm	up to 0.4mm
FPS01-400-40	40mm	41mm	1.5mm	Single	16mm	up to 0.4mm
FPS01-900-15	15mm	16mm	2.3mm	Single	4mm	up to 0.9mm
FPS01-900-20	20mm	21mm	2.3mm	Single	6mm	up to 0.9mm
FPS01-900-25	25mm	26mm	2.3mm	Single	8mm	up to 0.9mm
FPS01-90Q-34	34mm	35mm	2.3mm	Single	13mm	up to 0.9mm
FPS01-900-45	45mm	46mm	2.3mm	Single	16mm	up to 0.9mm